

JALS-C-035W DIMMING SERIES

■Features

- Constant current design
- Universal AC input (90-305Vac)
- 3 in 1 dimming(0-10V,PWM,Rx resistance)
- Protections: SCP, OVP, OTP,OPP
- High Efficiency (Up to 91%)
- Active Power Factor Correction (0.99 Typical)
- Lightning Protection
- Waterproof (IP67)
- Comply With UL8750 & EN61347 Safety Regulations
- 5 years warranty

■Application

- Suitable for LED street lights,tunnel lights,landscape lights.

General Description

The document detail the electrical, mechanical and environmental specifications for JALS-C-035M series LED driver, these driver are single channel output and can provide 35 W max. continuous output power.

Models & Key parameters

Model	Output Power (W)	Rated Output Voltage(Vdc)	Output Current (A)	Typ. Efficiency ※1	Power Factor	
					110Vac	230Vac
JALS-C-035M012	35W	12	2.90	86.5%	>0.98	>0.92
JALS-C-035M015	35W	15	2.30	86.5%	>0.98	>0.92
JALS-C-035M020	35W	20	1.75	88.5%	>0.98	>0.92
JALS-C-035M024	35W	24	1.40	88.5%	>0.98	>0.92
JALS-C-035M030	35W	30	1.15	89.0%	>0.98	>0.92
JALS-C-035M036	35W	36★ ※2	1.05	89.0%	>0.98	>0.92
JALS-C-035M042	35W	42★	0.83	90.0%	>0.98	>0.92
JALS-C-035M048	35W	48★	0.70	90.5%	>0.98	>0.92
JALS-C-035M054	35W	54	0.60	91.0%	>0.98	>0.92
NOTE	※1: Typ. Efficiency are measured at full load and 220 Vac input. ※2: ★ means the popular models, we will keep sufficient stock for prompt delivery.					

Specification



OUTPUT SPECIFICATION											
OUTPUT	Rated Output (Vdc)	12	15	20	24	30	36	42	48	54	
	CONSTANT CURRENT RANGE(V)	3~12	3~15	3~20	3~24	3~30	3~36	3~42	3~48	3~54	
	RATED CURRENT(A)	2.9	2.3	1.75	1.4	1.15	1.05	0.83	0.7	0.6	
	RATED POWER(W)	35	35	35	35	35	35	35	35	35	
	RIPPLE& NOISE(max.)※3	10%Vo									
	VOLTAGE TOLERANCE	5%Vo									
	LINE REGULATION	1%Vo									
	LOAD REGULATION	3%Vo									
	HOLD UP TIME (Typ.)	8.5mS min. @ Full load &110Vac, 10mS min. @ Full load &220Vac									
INPUT SPECIFICATION											

JALS-C-035W DIMMING SERIES


INPUT	VOLTAGE RANGE	90-305Vac								
	FREQUENCY RANGE	47-63Hz								
	EFFICIENCY (Typ.)	86.5%	86.5%	88.5%	88.5%	89.0%	89.0%	90.0%	90.5%	91.0%
	AC CURRENT (Typ.)	1.0Amax. @ 100-277Vac input & Full load.								
	INRUSH CURRENT	65Amax. @ 230Vac input,25°C.								
	LEAKAGE CURRENT	0.6mA max. at input 277Vac								
PROTECTION										
PROTECT ION	Input OVP	315Vac (Latch mode. The power supply shall return to normal operation only after the power is turn-on again.)								
	Output OVP ※4	(1.2-1.4)V _o								
	SCP	No damage shall occur when any output operating in a short circuit condition. The power supply shall be self-recovery when the fault condition is removed.								
ENVIRONMENT REQUIREMENTS										
ENVIRON MENT REQUIRE MENTS	Operating Temperature	-35°C to +70°C								
	Operating Relative Humidity	10%RH to 100%RH								
	Storage Temperature	-40°C to +85°C								
	Storage Relative Humidity	5% to 100%RH non-condensing @ Sea level shall be low 10,000 feet.								
	Vibration	10 to 300Hz sweep at a constant acceleration of 1.0G(Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z.								
	Waterproof grade	P67								
SAFETY&EMC										
SAFETY& EMC	SAFETY STANDARDS	UL8750, UL1310,IEC61347,GB19510.								
	WITHSTAND VOLTAGE	L/N-GND:4KV, L-N:2KV								
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25 / 70% RH								
	EMC IMMUNITY	Compliance to EN 61000-3-2, 3EN 61000-4-2, 3,4,5,6,8,11, EN 61547								
SAFETY APPROVAL										
CERTIFIED	UL,CB,CE,CQC									
RELIABILITY REQUIREMENTS										
RELIABIL ITY REQUIRE MENTS	Burn-in	The power supply shall undergo a minimum of 4 Hours burn-in test at 40°C±5°C under full load condition								
	Life Time	≥50,000 hours at 60°C measured at 110Vac input,and 80% load.								
	MTBF	≥ 340,000 hours at 25°C, measured at 110Vac input,and 80% load. (MIL-HDBK-217F)								
NOTE	※3: Latch mode. The power supply shall return to normal operation only after the power is turn-on again. Ripple & Noise: Measurement is done by 20MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic- capacitor and a 10uF electrolysis capacitor. And the test under the condition of rated input and rated output) ※4: Latch mode. The power supply shall return to normal operation only after the power is turn-on again.									

JALS-C-035W DIMMING SERIES


Derating Curve

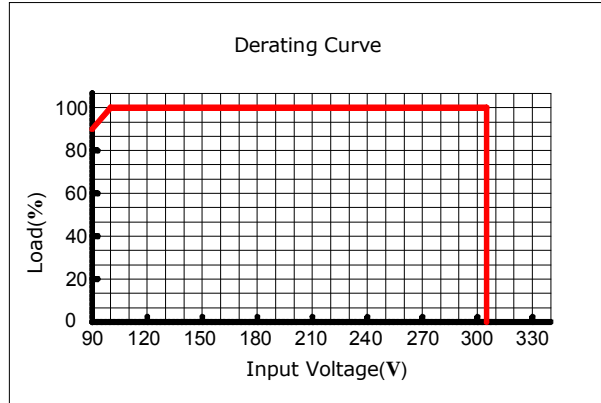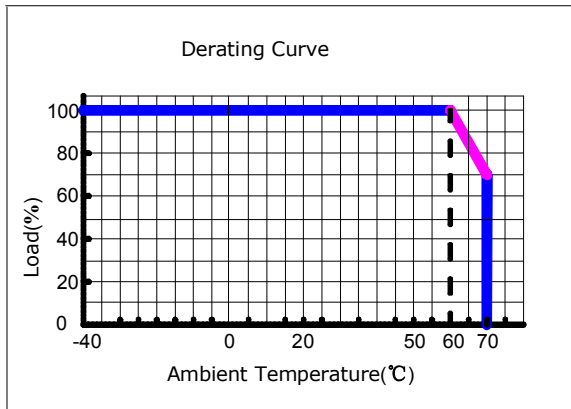

Power Factor Characteristic


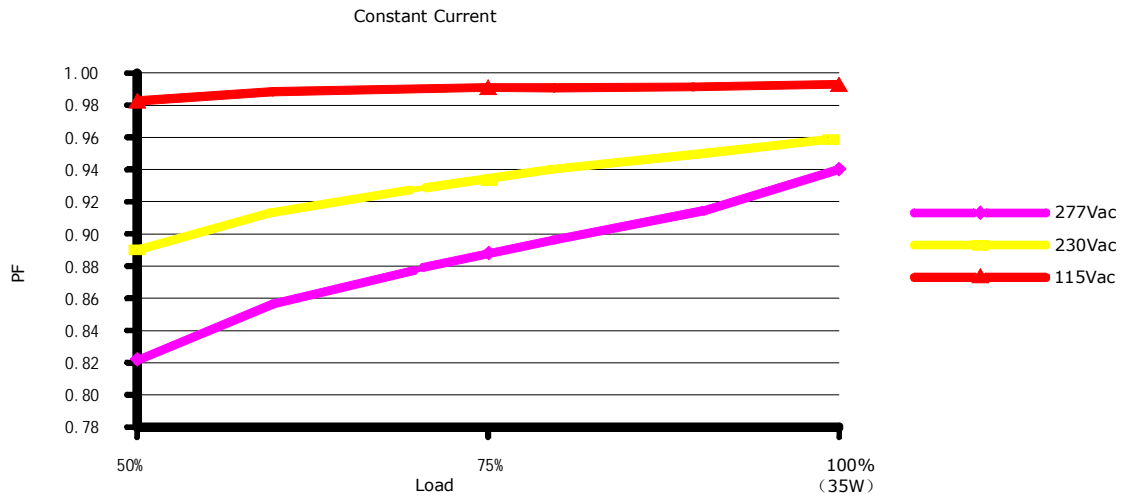


Efficiency curve(for 36V only)

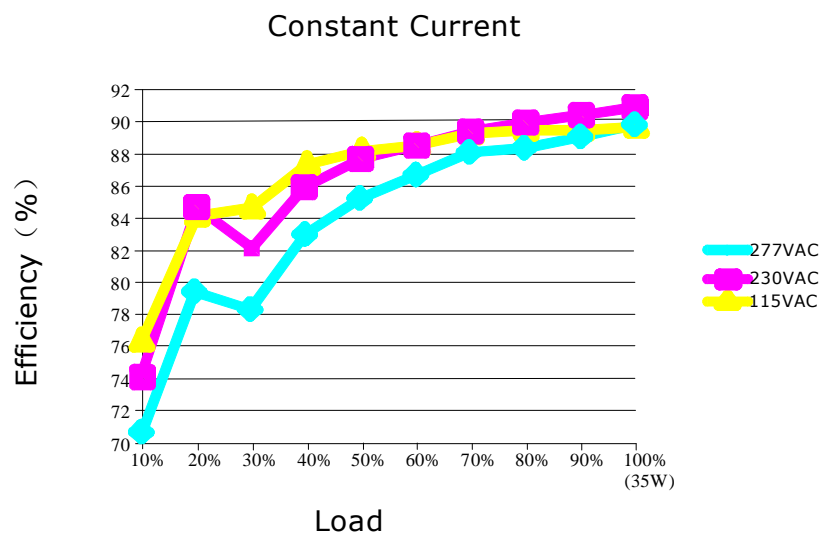


JALS-C-035W DIMMING SERIES


Life vs tc curve

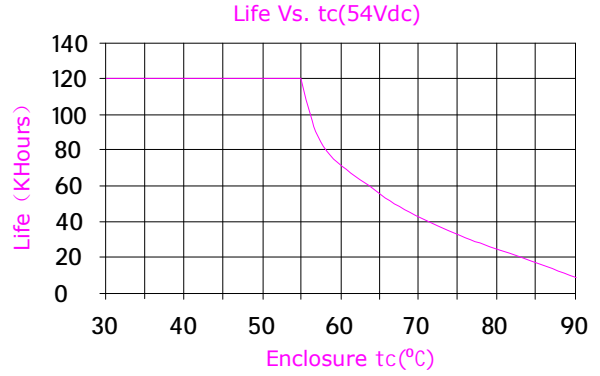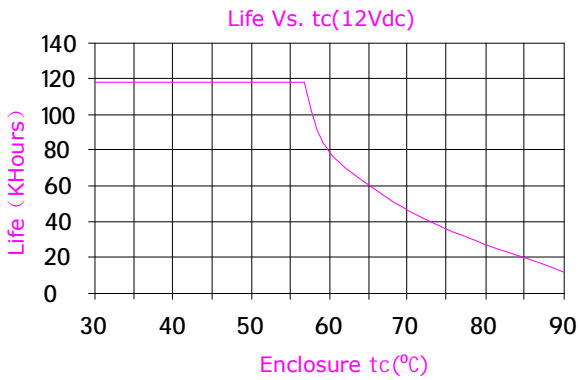

Dimming Control

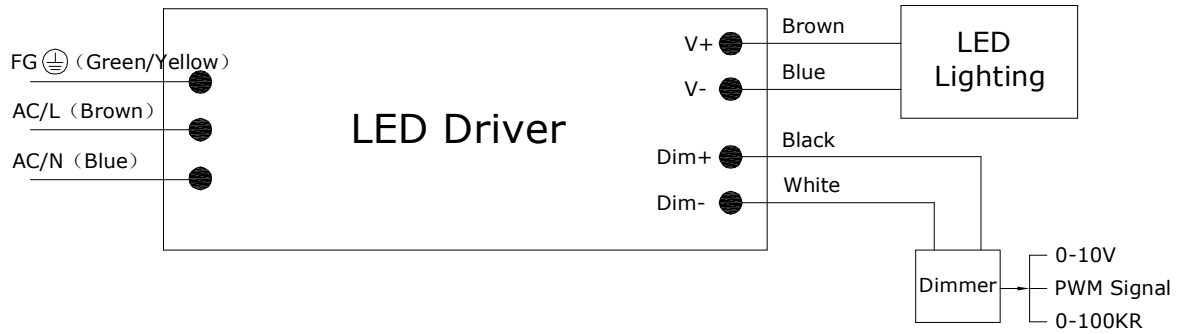

A) 0-10V Dimming Voltage/Current Proportion Curve

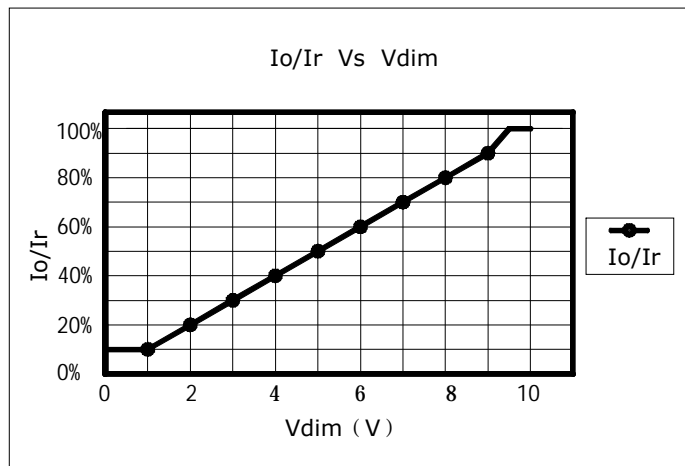


NoTE: I_o is actual output current and I_r is rated current without dimming control.

0-10V signal level	1	2	3	4	5	6	7	8	9	10
I_o (A)	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%


JALS-C-035W DIMMING SERIES

B) PWM Dimming Voltage/Current Proportion Curve

PWM Dimming Control

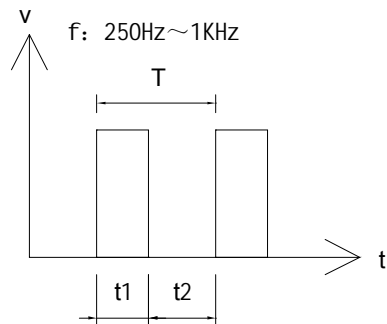


$$\text{Duty} = \frac{t_1}{t_1+t_2} (10\% \sim 100\%)$$

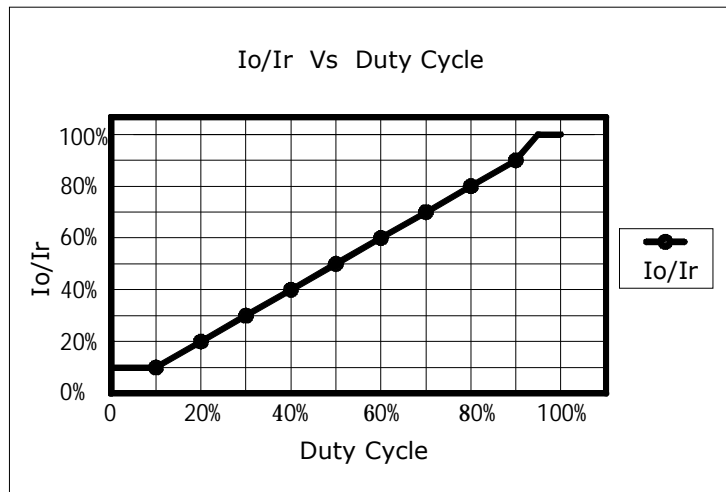

Dimming Port Condition:

Type	Condition
PWM Dimming	Frequency, f: 250Hz~1KHz
	High-Level, Ho: 5-10V, 5-10V can be responded, means "ON"
	Low-Level, Lo: 0V, 0~2.5V can be response, means "OFF"
	Sink current, Io : <5 mA
	Signal Open, Po: 100% Brightness
	Dimming range, Pr: 10%~100%


C) Resistance Dimming /Current Proportion Curve

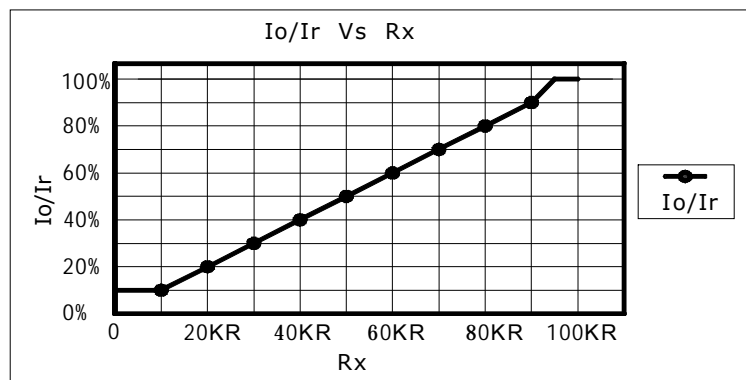

NOTE: Please DO NOT connect "V-" to "Dim-", otherwise the LED drive can not work normally.

JALS-C-035W DIMMING SERIES

Block Diagram

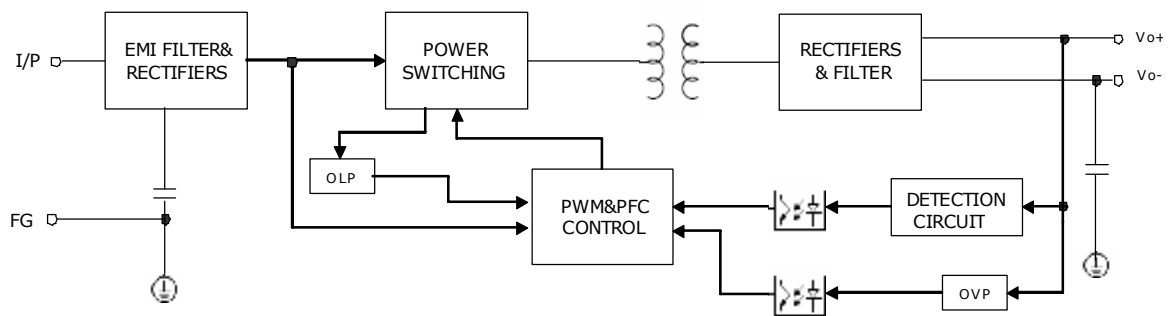

Mechanical Specification

